


2015-123 Upconverter, 2025 - 2300 MHz

The 2015-123 Upconverter converts 70 ± 18 MHz to 2025 to 2300 MHz in 1kHz, 10kHz, or 125kHz steps (user selectable) with low group delay and flat frequency response. Synthesized local oscillators (LO) provide very low phase noise and ±0.01 ppm stability frequency selection. Multi-function push button switches select the RF frequency, gain, and other parameters. Front panel LEDs provide indication of DC power (green), PLL alarm (red), remote operation (yellow) or the TX carrier is muted (yellow). Variable attenuators for the IF input and output provide a gain range of -10 to +30 dB as adjusted by the front panel multi-function push-button switches. Remote operation allows selection of frequency and gain. Parameter selection and frequency and gain settings appear on the LCD display. Connectors are BNC female for IF Input, RF outputs and the 10MHz external reference input and 10MHz reference output. The 10MHz reference signal (internal or external) can be sent to the 10MHz reference output connector and/or to the RF OUT connectors. The RF signal can be switched between two RF outputs (A and B) via an integrated, remotely controlled RF switch. The unit is powered by a 90-260 VAC power supply, and is housed in a 1 3/4" X 19 " X 16" rack mount chassis.

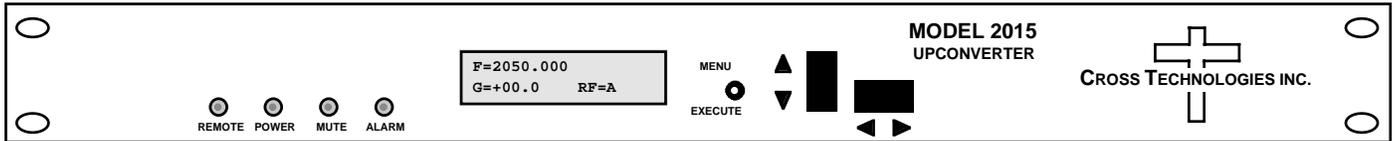

Front Panel

EQUIPMENT SPECIFICATIONS*

Input Characteristics (IF)

Impedance/Return Loss 50Ω/18 dB
 Frequency 70 ± 18 MHz
 Input Level -40 to -10 dBm

Output Characteristics (RF)

Impedance/Return Loss 50Ω/12 dB
 Frequency 2025 to 2300 MHz
 Output level -20 to 0 dBm
 Output 1 dB comp. +5 dBm

Channel Characteristics

Gain range (adjustable) -10.0 to +30.0 dB
 Frequency Response ±1.5 dB, 2025-2300 MHz ; ± 0.5 dB, 36 MHz BW
 Spurious Response < -50 dBc, in band
 Group Delay, max 0.01 ns/MHz² parabolic; 0.03 ns/MHz linear; 1 ns ripple
 Frequency Sense Non-inverting

Synthesizer Characteristics


Frequency Accuracy ± .01 ppm internal ref.
 Frequency Step 1kHz, 10kHz, or 125kHz (user selectable)
 10 MHz In/Out Level 3 dBm ± 3 dB (option E)
 Phase Noise @ Freq | 100Hz 1kHz 10kHz 100kHz 1MHz
 dBC/Hz | < -75 < -90 < -97 < -107 < -117

Controls, Indicators

Frequency Selection direct readout LCD; manual or remote selection
 Gain Selection direct readout LCD; manual or remote selection
 Pwr; Alarm; Rem; Mute Green LED; Red LED; Yellow LED; Yellow LED
 Remote RS232C, 9600 baud (RS485, option Q)

Other

RF Connector BNC (female)
 IF Connector BNC (female)
 10 MHz Connector BNC (female), 50Ω/75Ω (option E)
 Alarm/Remote Connector DB9 (female) - NO or NC contact closure on Alarm
 Size 19 inch, 1RU standard chassis 1.75"high X 16.0" deep
 Power 90-260 VAC, 47-63 Hz, 45 W max

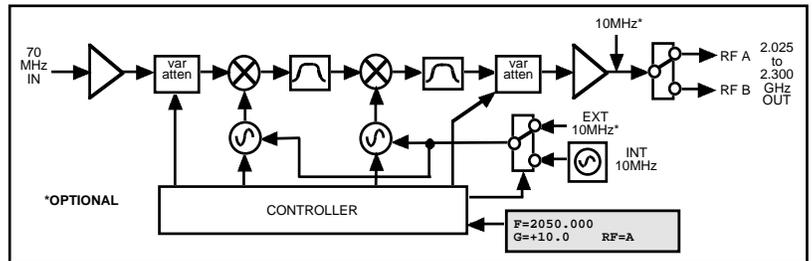

Block Diagram

Available Options

- E - External 10 MHz ref input & output w/ RF insertion
- Q - RS485 Remote Interface
- Z - Attenuator 0.1 dB on Upconverter Connectors/Impedance
- B - 75Ω BNC (RF), 75Ω BNC (IF)
- C - 50Ω BNC (RF), 75Ω BNC (IF)
- D - 50Ω BNC (RF), 50Ω BNC (IF)
- N - 50Ω N-type (RF), 75Ω BNC (IF)
- M - 50Ω N-type (RF), 50Ω BNC (IF)

*10°C to 40°C; Specifications subject to change without notice