

1583-09 DATA SPLITTER

The 1583-09 Data Splitter provides 9 RS232C outputs of the data signal (pin 2 of the DB9 connector).

EQUIPMENT DESCRIPTION

The 1583-09 Data Splitter provides 9 RS232C outputs of the data signal (pin 2 of the DB9 connector). One of the outputs is a hard wired pass through of the input which can be used for very important functions or to further split the data. Dual power supplies provide redundant power to the 1583-09 with front panel LEDs indicating proper power supply operation. The unit is housed in a 1 3/4", rack mount chassis and all data connectors are DB9, female.

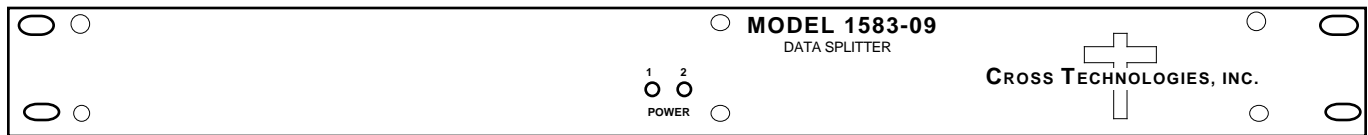


FIGURE 1.0 1583-09 DATA SPLITTER

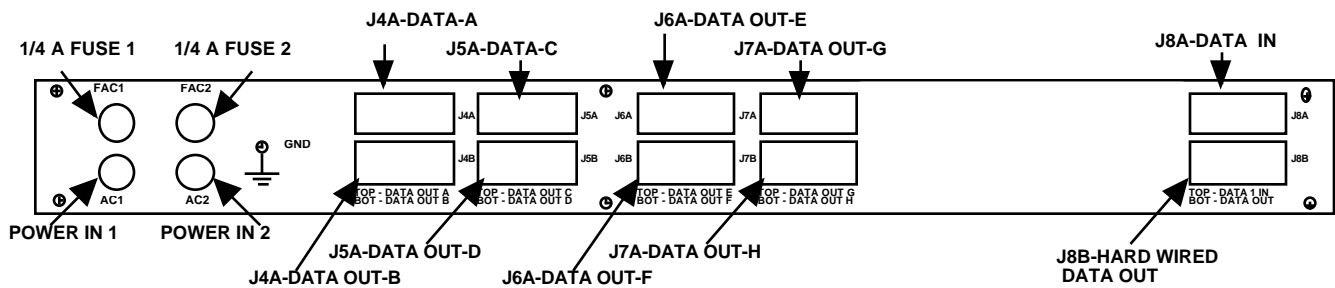


FIGURE 2.0 1583-09 REAR PANEL

1583-09 Technical Specifications

Data Characteristics

Input/Output	RS232C
Data rate	128 kB/s max
Number of outputs	1 - Hard wired loop of the input 8 - Buffered RS232C outputs
Connector	DB9, female

Indicators

POWER CH1 LED	Turns green when power is applied to number 1 input on the rear panel
POWER CH2 LED	Turns green when power is applied to number 2 input on the rear panel

Other

Mechanical	19 inch standard chassis 1.75"high X 7.5" deep
Power	115 ± 10 VAC, 60Hz, 10 watts

*Specifications subject to change without notice