


2015-57-140 Upconverter, 140 ± 36 MHz to 5.845 - 6.725 GHz

The 2015-57-140 Upconverter converts 140 ± 36 MHz to 5.845 to 6.725 GHz in 125 kHz steps (**1 kHz steps, option X1005**) with low group delay and flat frequency response. Synthesized local oscillators (LO) provide frequency selection with ±0.01 ppm stability. Push button switches select the RF frequency, gain, and other parameters. Front panel LEDs provide indication of DC power (green), remote operation (yellow), PLL alarm (red), or the TX carrier is muted (yellow). Variable attenuators for the IF input and RF output provide a gain range of 0 to +30 dB as adjusted by the front panel pushbutton switches. Remote **M&C** allows selection of the **10 MHz reference**, frequency and gain. Parameter selection and frequency and gain settings appear on the LCD display. Connectors are BNC female for IF input and 10MHz reference input and output, and Type N female for the RF output (other connector configurations available). The unit is powered by a 100-240 ±10% VAC power supply; and housed in a 1.75" X 19" X 16" rack mount chassis.

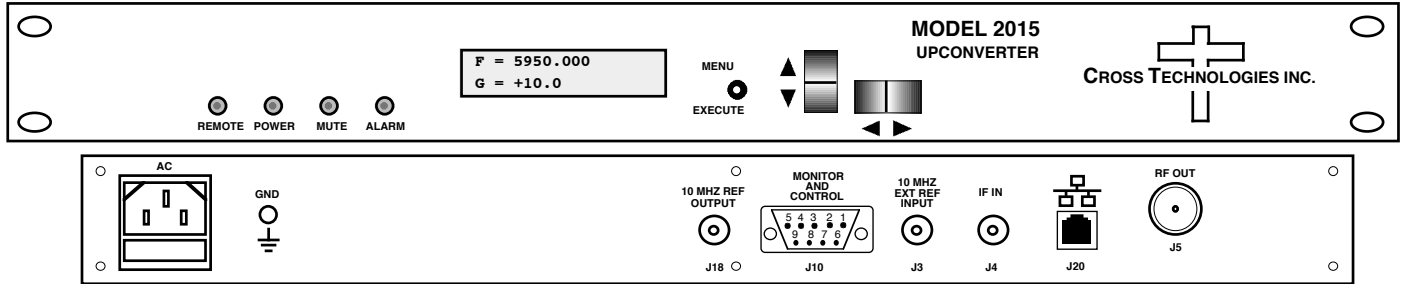

Front and Rear Panels (shown with optional Ethernet)

EQUIPMENT SPECIFICATIONS*

Input Characteristics (IF)

Impedance/Return Loss 75Ω/18 dB min.
 Frequency 140 ± 36 MHz
 Input Level -30 to -10 dBm

Output Characteristics (RF)

Impedance/Return Loss 50Ω/14 dB min.
 Frequency 5.845 to 6.725 GHz
 Output level -20 to 0 dBm
 Output 1 dB compression +10 dBm, **Gain = +30**

Channel Characteristics

Max. Gain; range **+30 ± 2 dB**; 0 to +30 dB, 0.5 ± 0.5 dB steps
 Spurious Response <-50 dBC
 Intermodulation <-50 dBC for two carriers each at -5 dBm out
 Frequency Response ±1.5 dB, 5.845-6.725 GHz; ±0.7 dB, 72 MHz BW
 Group Delay, max **0.0035 ns/MHz²** parabolic; **0.025 ns/MHz** linear; 1 ns ripple
 Frequency Sense Non-inverting

Synthesizer Characteristics

Frequency Accuracy ±0.01 ppm; Ext. ref. input
 Frequency Step 125 kHz minimum; (**1 kHz steps, option X1005**)
 10 MHz In/Out Level 3 dBm ± 3 dB


Phase Noise @ Freq	100 Hz	1kHz	10kHz	100kHz	1 MHz
dBC/Hz	-70	-75	-80	-95	-110

Controls, Indicators

Freq/Gain Selection direct readout LCD; pushbutton switches or remote selection
 Pwr; Alarm; Rem; Mute Green LED; Red LED; Yellow LED; Yellow LED
 Remote **M&C** RS232C, 9600 baud; **RS485/422 or Ethernet optional**

Other

RF / IF Connectors RF - Type N (female) / IF - BNC (female)
 10 MHz Connectors BNC (female), **75Ω, works with 50 or 75 ohms**
 Alarm/Remote Connector DB9 - NO or NC contact closure on Alarm
 Size 19 inch, 1RU standard chassis 1.75"high X 16.0" deep
 Power / Temp Range 100-240 ±10% VAC, 47-63 Hz, 45 watts max /

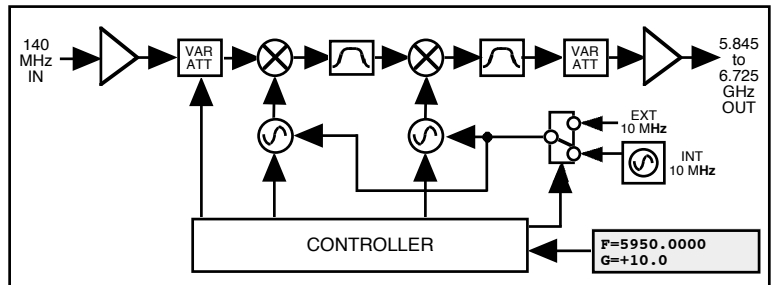

Block Diagram

Available Options

W7 - RF/IF Monitor Ports (Front)
 W31 - Ext. Temp 0C to +50C
 X1005 - 1 kHz frequency step

Remote M&C Interfaces:

Q - RS485/422
 W8 - Ethernet; w/Web Browser (WB)
 W18 - Ethernet; w/WB & SNMP
 W28 - Ethernet; w/TCP/IP, Telnet

Connectors/Impedance

STD. - 50Ω Type N (RF), 75Ω BNC (IF)
 M - 50Ω Type N (RF), 50Ω BNC (IF)
 S - 50Ω SMA (RF), 50Ω BNC (IF)
 S7 - 50Ω SMA (RF), 75Ω BNC (IF)
Contact Cross for other options

*+10°C to +40°C; Specifications subject to change without notice