


2115-123 Block Upconverter, 12.2 - 12.7 GHz

The 2115-123 Block Upconverter converts 0.95 - 1.45 GHz to 12.2 - 12.7 GHz with a local oscillator at 11.25 GHz. Front panel LEDs provide indication of DC Power, External 10 MHz, and PLL Alarm. The L-band to RF gain is 0 dB. Connectors are SMA female for the RF and BNC female for the L-Band and external reference input and reference output. A three-way switch controls which 10 MHz reference is being used. In the INT position, the internal reference is used, in the EXT position, the external reference is used, and in the AUTO position, the internal reference is used unless a +3 dBm ± 3 dB, 10MHz reference signal is connected to the external reference input. The 2115 is powered by a 100-240 ±10% VAC power supply, and mounted in a 1 3/4" X 19" X 14" rack mount chassis.

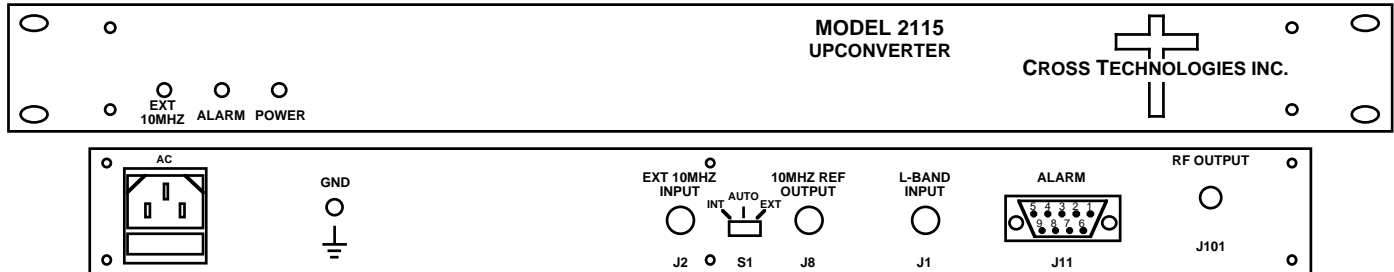

Front and Rear Panels

EQUIPMENT SPECIFICATIONS*

Input Characteristics


Impedance/Return Loss 50Ω/14 dB
 Frequency 0.95 to 1.45 GHz
 Noise Figure, Max. 20 dB max gain
 Input Level range -10 to -30

dBm

Input 1 dB compression +5 dBm

Output Characteristics

Impedance/Return Loss 50 Ω /14 dB
 Frequency 12.2 to 12.7 GHz
 Output Level Range -10 to -30 dBm

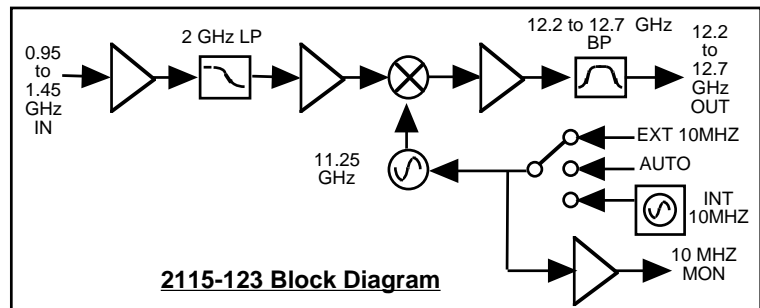

2115-123 Block Diagram

Channel Characteristics

Gain 0 dB ±1 dB
 Image Rejection > 60 dB, min
 Spurious, Inband <-70 dBm
 Spurious, Out of band <-65 dBm
 Intermodulation <-50 dBC for two carriers each at -13 dBm out
 Frequency Response ±1 dB, 12.2-12.7 GHz out; ± 0.5 dB, 40 MHz BW
 Frequency Sense Non-inverting

LO Characteristics

LO Frequency 11.25 GHz
 Frequency Accuracy ± 0.01 ppm max over temp internal reference; external reference input

Phase Noise @ F (Hz) >	100	1K	10K	100K	1M
dBC/Hz	-70	-80	-85	-100	-110

10 MHz In/Out level +3 dBm, ± 3 dB

Controls, Indicators

Ext 10 MHz Yellow LED, indicates external 10 MHz reference selected (rear panel DPDT switch)
 PLL Alarm Red LED, External contact closure
 Power Green LED

Available Connector Options

Other	RF Connector SMA (female), 50Ω L-Band Connector BNC (female), 50Ω 10 MHz connectors BNC (female), 75Ω connector; Works for 50Ω or 75Ω Alarm Connector DB9 - NO or NC contact closure on Alarm Size 19 inch standard chassis 1.75" high X 14.0" deep Power 100-240 ±10% VAC, 47 - 63 Hz, 25 watts max.	M - 50Ω N-type (RF), 50Ω BNC (L-BAND) N - 50Ω N-type (RF), 75Ω BNC (L-BAND) NF - 50Ω N-type (RF), 75Ω F-type (L-BAND) NN - 50Ω N-type (RF), 50Ω N-type (L-BAND) S7 - 50Ω SMA (RF), 75Ω BNC (L-BAND) SF - 50Ω SMA (RF), 75Ω F-type (L-BAND) SN - 50Ω SMA (RF), 50Ω N-type (L-BAND) SS - 50Ω SMA (RF), 50Ω SMA (L-BAND)
--------------	--	--

*+10°C to +40°C; Specifications subject to change without notice