

2116-6T4 Test Translator, 5.845 - 6.425 GHz to 3.62 - 4.20 GHz

The 2116-6T4 Test Translator converts 5.845 - 6.425 GHz to 3.62 - 4.20 GHz with a local oscillator at 2.225 GHz. Front panel LEDs provide indication of external 10 MHz (yellow), PLL alarm (red), and DC power (green). The gain is -30 dB to Output #1 and -50 to Output #2. Connectors are N-type female for RF and BNC female for the external reference input and reference output. A three-way switch controls which 10 MHz reference is being used. In the INT position, the internal reference is used, in the EXT position, the external reference is used, and in the AUTO position, the internal reference is used unless a +3 dBm \pm 3 dB, 10MHz reference signal is connected to the external reference input. The 2116 is powered by a 100-240 \pm 10% VAC power supply, and housed in a 1 3/4" X 19" X 14" rack mount chassis.



Front Panel

EQUIPMENT SPECIFICATIONS*

Input Characteristics

Impedance/Return Loss 50 Ω /15 dB
 Frequency 5.845 to 6.425 GHz
 Input Level range -10 to -30 dBm
 Input 1 dB compression 0 dBm

Output Characteristics

Impedance/Return Loss 50 Ω /15 dB
 Frequency 3.62 to 4.20 GHz
 Output Level Range (#1) -40 to -60 dBm
 Output Level Range (#2) -60 to -80 dBm


Channel Characteristics

Gain -30 dB \pm 2 dB (Output #1); -50 dB \pm 2 dB (Output #2)
 Input/Output Isolation 60 dB, min
 Intermodulation <-50 dBC for two carriers each at -10 dBm
 Frequency Response \pm 1.5 dB, over frequency band; \pm 0.5 dB, 40 MHz BW
 Frequency Sense Non-inverting

LO Characteristics

LO Frequency 2.225 GHz
 Frequency Accuracy \pm 0.01 ppm max over temp internal reference; ext. ref. input
 10 MHz In/Out Level +3 dBm \pm 3 dB

Phase Noise @ Freq	100 Hz	1kHz	10kHz	100kHz	1 MHz
dBC/Hz	-70	-80	-90	-100	-110

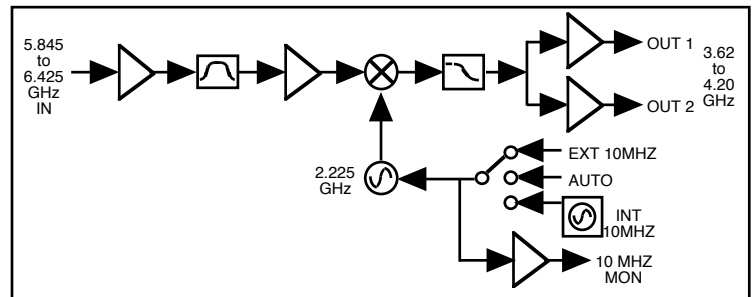

Block Diagram

Controls, Indicators

Power Green LED
 PLL Alarm Red LED, External contact closure
 Ext 10 MHz Yellow LED, indicates external 10 MHz reference selected (rear panel DPDT switch)
 10 MHz Reference 3-way Switch (selects INTERNAL, EXTERNAL, or AUTO mode)

Other

RF Connectors N-type (female)
 10 MHz Connectors BNC (female), 50 Ω /75 Ω
 Alarm Connector DB9 (female) - NO or NC contact closure on Alarm
 Size 19 inch standard chassis 1.75" high X 14" deep
 Power 100-240 \pm 10% VAC, 47 - 63 Hz, 45 watts max.

Available Options

Connectors/Impedance
 SS - 50 Ω SMA (RF)

*10°C to 40°C; Specifications subject to change without notice