


**2017-25-01 Up/Downconverter, 2.460 to 2.540 GHz**

The 2017-25-01 Up/Downconverter converts 70 MHz to **2.460 to 2.540 GHz** (Up) and **2.460 to 2.540 GHz** to 70 MHz (Down) in 1 MHz steps with low group delay and flat frequency response. Synthesized local oscillators (LO) provide frequency selection. Multi-function push button switches select the RF frequency, gain, and other parameters. Front panel LEDs provide indication of DC power (green), PLL alarm for up and downconverters (red), remote operation (yellow), and upconverter mute (yellow). Gain is manually controlled over a -10 to +30 dB range for the upconverter and over a 0 to +50 dB range for the downconverter as adjusted by the front panel multi-function push-button switches. Remote operation allows selection of frequency and gain. Parameter selection and frequency and gain settings appear on the LCD display. Connectors are BNC female (75Ω) for IF and the optional external reference input and output, and BNC female (50Ω) for RF. A high stability ( $\pm 0.01$ ppm) option is also available. The unit is powered by a 100-240  $\pm 10\%$  VAC power supply and housed in a 1.75" X 19" X 16" rack mount chassis.

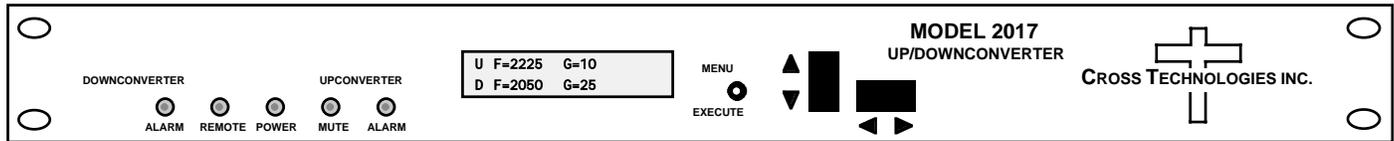

**Front Panel**

**EQUIPMENT SPECIFICATIONS\***

**UPCONVERTER**

**Input Characteristics (IF)**

Impedance/Return Loss 75Ω /18 dB  
Frequency 70  $\pm$  18 MHz  
Input Level Range -40 to -10 dBm

**Output Characteristics (RF)**

Impedance/Return Loss 50Ω/12 dB  
Frequency **2.460 to 2.540 GHz**  
Output level -20 to 0 dBm  
Output 1 dB compression +5 dBm

**Channel Characteristics**

Gain range (adjustable) -10 to +30 dB  
Frequency Sense Non-inverting

**UP AND DOWNCONVERTER**

**Channel Characteristics**

Frequency Response  $\pm 1.5$  dB, in band ;  $\pm 0.5$  dB, 36 MHz BW  
Spurious Response < -50 dBc, in band  
Group Delay, max 0.01 ns/MHz<sup>2</sup> parabolic; 0.03 ns/MHz linear; 1 ns ripple

**Synthesizer Characteristics**

Frequency Accuracy  $\pm 1.0$  ppm internal reference ( $\pm 0.01$  ppm, option H)  
Frequency Step 1.0 MHz minimum (125 kHz, option X)  
10 MHz In/Out Level 3 dBm  $\pm$  3 dB (option E only)  
Phase Noise  
@ Freq | 100Hz 1kHz 10kHz 100kHz 1MHz  
dBc/Hz | < -70 < -70 < -80 < -95 < -105

**Controls, Indicators**

Freq/Gain Selection direct readout LCD; manual or remote selection  
Power; Alarm; Up Mute Green LED; Red LED; Yellow LED  
Remote Yellow LED; RS232C, 9600 baud (RS485, option Q)

**Other**

RF, IF Connectors BNC (female), BNC (female)  
10MHz Connectors BNC (female), 50Ω/75Ω (**option E**)  
Alarm/Remote Connector DB9 (female) - NO or NC contact closure on Alarm  
Size 19 inch, 1RU standard chassis 1.75"high X 16.0" deep  
Power 100-240  $\pm 10\%$  VAC, 47-63 Hz, 45 W max

**DOWNCONVERTER**

**Input Characteristics (RF)**

Impedance/Return Loss 50Ω /12 dB  
Frequency **2.460 to 2.540 GHz**  
Noise Figure, max. 15 dB (max gain)  
Input Level Range -70 to -20 dBm  
Input 1dB compression -15 dBm

**Output Characteristics (IF)**

Impedance/Return Loss 75Ω/18 dB  
Frequency 70  $\pm$  18 MHz  
Output level/max linear -20dBm / -10dBm  
Output 1 dB compression -5 dBm

**Channel Characteristics**

Gain range (adjustable) 0.0 to +50.0 dB, 1dB steps  
Frequency Sense Inverting or Non-inverting (selectable)

**Available Options**

- E - External 10 MHz ref input & output
- H - High Stability ( $\pm 0.01$ ) Internal Ref
- Q - RS485 Remote Interface
- T - Temperature Sensor
- X - 125 kHz Frequency Steps
- Z - 0.1 dB Attenuator Steps on Upconverter Connectors/Impedance
- B - 75Ω BNC (RF), 75Ω BNC (IF)
- C - 50Ω BNC (RF), 75Ω BNC (IF)
- D - 50Ω BNC (RF), 50Ω BNC (IF)
- N - 50Ω N-type (RF), 75Ω BNC (IF)
- M - 50Ω N-type (RF), 50Ω BNC (IF)

\*10°C to 40°C; Specifications subject to change without notice