


4116-T300 Ka-band Translator, Weather Resistant*

The 4116-T300 Ka-band Translator converts 27.5 - 31.0 GHz to 17.7 - 21.2 GHz in four selectable fixed bands and to 2.5 - 6.0 GHz for monitoring purposes. LEDs provide indication of DC Power, and PLL Alarms. The maximum gain is +20 dB. Connectors are 2.92mm for the RF In and RF Monitor, Super SMA for the RF Out, Type N for the C-band monitor, and SMA (**all female**) for the external reference input and output. Gain, band select, and internal 10 MHz frequency are controlled by the M&C (Ethernet and/or Status/Control) Connectors. **In AUTO, the 10 MHz reference stays in external if the external level is in the +2 to +8 dBm range.** The 4116-T300 is powered by a 100-240 ±10% VAC power supply and mounted in a 8" Wide X 6" High X 16" Deep, Weather Resistant* enclosure.

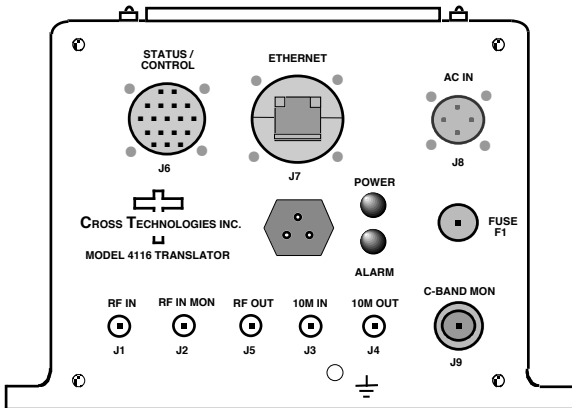

BAND CHART-Frequency Band	Band	Input (GHz)	Output (GHz)	Translation (GHz)
	1	27.5 - 28.5	17.7 - 18.7	9.800 (8.8-10.3)
	2	28.0 - 29.0	18.3 - 19.3	9.700 (8.7-10.3)
	3	29.0 - 30.0	19.2 - 20.2	9.800 (8.8-10.3)
	4	30.0 - 31.0	20.2 - 21.2	9.800 (8.8-10.3)
	5	27.5 - 28.5	18.3 - 19.3	9.200 (8.3-10.2)
	6	27.5 - 28.5	19.2 - 20.2	8.300 (8.3-9.3)
	7	28.0 - 29.0	17.7 - 18.7	10.300 (9.3-10.3)
	8	28.0 - 29.0	19.2 - 20.2	8.800 (8.3-9.8)
	9	29.0 - 30.0	18.7 - 19.7	10.300
	10	29.0 - 30.0	19.0 - 20.0	10.000 (9.7-10.3)
	11	30.0 - 31.0	20.0 - 21.0	10.000 (9.8-10.3)

EQUIPMENT SPECIFICATIONS**

Input Characteristics

Impedance/Return Loss 50Ω/14 dB
 Frequency SEE BAND CHART
 Noise Figure, Max. 20 dB max gain
 Input Level range -40 to -15 dBm

Output Characteristics

Impedance/Return Loss 50 Ω /14 dB, **Mute & UnMute**
 Frequency (GHz) SEE BAND CHART
 Output Level Range -15 to 0 dBm
 Output 1 dB compr. +10 dBm, **max. gain**
Mute >60 dB @ 0 dBm output

Channel Characteristics

Gain at Fc +20 ±3 dB, (+20 to -10 dB variable in 1 dB steps)
 Input to output isolation > 60 dB, min (**at max gain and 0 dBm out**)
 Spurious, Inband **SIG REL. <-45 dBC**, -15 to 0 dBm out; **SIG IND. <-50 dBm**; **fc ± 0.5 GHz**
 Spurious, Out of band **<-50 dBm, signal independent**; **fc ± 2 GHz**
Spurious, LO <-50 dBm, measured at the input; <-25 dBm, measured at the output
 Intermodulation <-50 dBC for two carriers **at 4 MHz spacing**, each at -7 dBm out
 Frequency Response ±2 dB, over RF band; ± 0.5 dB, 40 MHz BW
 Frequency Sense Non-inverting

LO Characteristics

LO Frequency Band Specific, **8.3 to 10.3 GHz translation range, 5 MHz steps**
 Frequency Accuracy ± 0.05 ppm max over temp internal reference; ext. ref. input

Phase Noise @ F (Hz) >	100	1K	10K	100K	1M
dBc/Hz	65	75	77	93	105

10 MHz level In/Mon +2 to +8 dBm in; Monitor Output = input level ± 1 dB, 50 ohms


Controls, Indicators

Gain, Band, 10M Freq. Gain, band select, and internal 10 MHz frequency via Ethernet M&C or Status/Control connector.
Power; PLL Alarm Green LED; Red LED, External Contact Closure

Other

RF In, RF Mon Con. **2.92mm (40 GHz) female, 50Ω**
 RF Out Connector **Super SMA (27 GHz) female, 50Ω**
 M&C Connector(s) **Status/Control Connector MS3112F-18P Weatherized Connector;**
Ethernet Connector Standard RJ45 Weatherized Connector
 C-Band Connector **Type N (female), 50Ω**
 10 MHz Connectors **SMA (female), 50Ω**
 Size **8" Wide X 6" High X 16" Deep, Weather Resistant* Enclosure**
 Power **100-240 ±10% VAC, 47 - 63 Hz, 30 watts max./ FCI Clipper Series CL1M1102 Connector**

**+0 to +50 degrees C; Specifications subject to change without notice

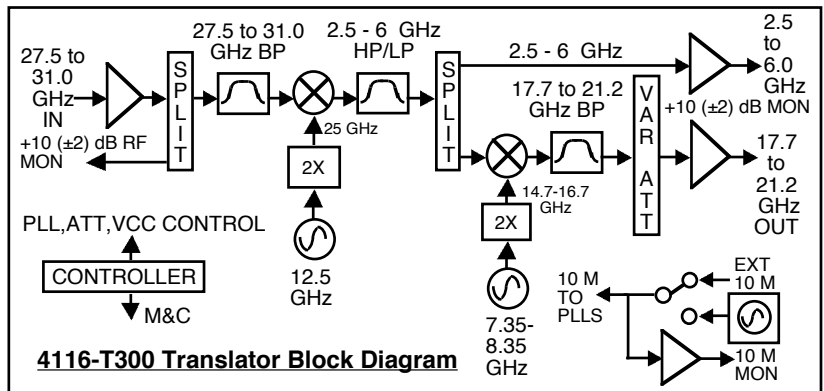

*Weather Resistant enclosures are designed to be water resistant for installation in an outdoor enclosure /antenna hut OR mounted outdoors on an antenna assembly at their specified temperature ranges. They are designed to be located "out in the elements" (water, sleet, snow, etc.) but they are *not* designed to be "submerged under" water.

If an extended temperature range is required, there is an **Extended Temperature** option (**Option W21**; -30°C to +60°C) available at an additional cost. Contact Cross for quote.