


**2016-24 Downconverter, 950 - 2150 MHz, 140 MHz IF**

The 2016-24 L-band Downconverter converts 950 to 2150 MHz in 1 kHz, 10 kHz, 100kHz, or 125 kHz steps (user selectable) to 140 ± 36 MHz with low group delay and flat frequency response. Synthesized local oscillators (LO) provide very low phase noise and ±0.01 ppm stability frequency selection. Multi-function push button switches select the RF frequency, gain, and other parameters. Front panel LEDs provide indication of DC power (green), PLL alarm (red), and remote operation (yellow). Gain is adjustable manually over a 0 to +50 dB range as adjusted by the front panel multi-function push-button switches. Remote operation allows selection of frequency and gain. Parameter selection and frequency and gain settings appear on the LCD display. Connectors are BNC female for IF output and the optional external reference input and output, and Type F female for the RF input. LNB +24 VDC, 0.4 Amps and 10 MHz reference can be inserted on the RF line as added options. The 10 MHz option also includes a 10 MHz output connector, which contains either the internal or external 10 MHz reference signal. The unit is powered by a 90-260 VAC power supply, and housed in a 1 3/4" X 19" X 16" rack mount chassis.

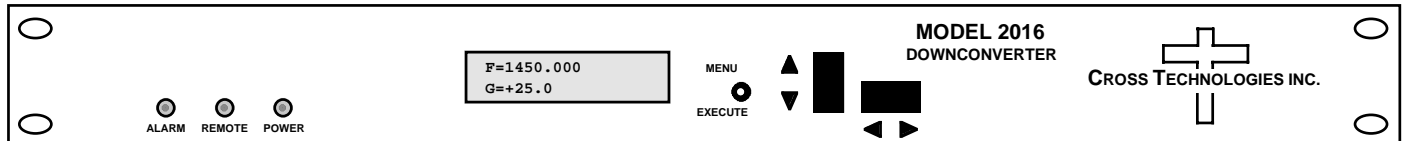

**Front Panel**

**EQUIPMENT SPECIFICATIONS\***

**Input Characteristics (RF)**

Impedance/Return Loss 75Ω /12 dB  
 Frequency 950 to 2150 MHz  
 Noise Figure, max. 15 dB (max gain)  
 Input Level Range -70 to -20 dBm  
 Input 1dB compression -15 dBm

**Output Characteristics (IF)**

Impedance/Return Loss 75Ω/18 dB  
 Frequency 140 ± 36 MHz  
 Output level/max linear -20dBm / -10dBm  
 Output 1 dB compression -5 dBm

**Channel Characteristics**

Gain range (adjustable) 0.0 to +50.0 dB  
 Image Rejection > 50 dB, min.  
 Frequency Response ±1.5 dB, 950 to 2150 MHz ; ± 0.5 dB, 72 MHz BW  
 Spurious Response < -50 dBc, in band  
 Group Delay, max 0.0035 ns/MHz<sup>2</sup> parabolic; 0.025 ns/MHz linear; 1 ns ripple  
 Frequency Sense Inverting or Non-inverting, selectable

**Synthesizer Characteristics**


Frequency Accuracy ±0.01 ppm internal reference  
 Frequency Step 1kHz, 10kHz, 100kHz, or 125kHz (user selectable)  
 10 MHz In/Out Level 3 dBm ± 3 dB (option E)  
 Phase Noise @ Freq | 100Hz 1kHz 10kHz 100kHz 1MHz  
 dBC/Hz | < -75 < -85 < -90 < -110 < -120

**Controls, Indicators**

Freq/Gain Selection direct readout LCD; push-button switches or remote cntl  
 Pwr; Alarm; Rem; Mute Green LED; Red LED; Yellow LED; Red LED  
 Remote RS232C, 9600 baud (RS485, option Q)

**Other**

RF, IF Connectors Type F (female), BNC (female)  
 10MHz Connectors BNC (female), 50Ω/75Ω (option E)  
 Alarm/Remote Connector DB9 (female) - NO or NC contact closure on Alarm  
 Size 19 inch, 1RU standard chassis 1.75"high X 16.0" deep  
 Power 90-260 VAC, 47-63 Hz, 45 W max

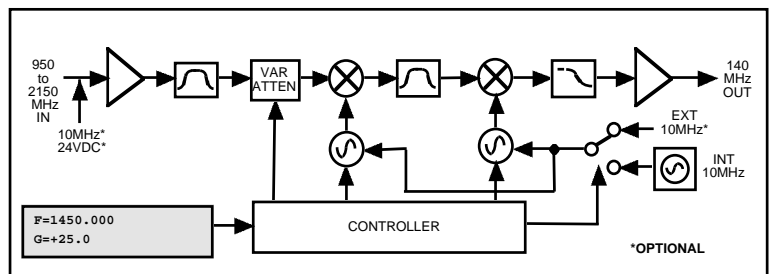

**Block Diagram**

**Available Options**

E - External 10 MHz ref in & out w/ RF insertion  
 L - LNB Voltage, +24VDC, 0.4 amps  
 Q - RS485 Remote Interface

**Connectors/Impedance**

B - 75Ω BNC (RF), 75Ω BNC (IF)  
 C - 50Ω BNC (RF), 75Ω BNC (IF)  
 D - 50Ω BNC (RF), 50Ω BNC (IF)  
 N - 50Ω N-type (RF), 75Ω BNC (IF)  
 M - 50Ω N-type (RF), 50Ω BNC (IF)

\*10°C to 40°C; Specifications subject to change without notice