
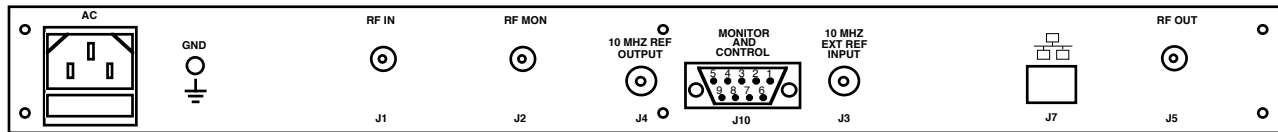


3116-T71-184 Multi-Band Translator

The 3116-T71-184 Translator converts one of **five** input RF bands to one of **five** output RF bands in seven unique combinations. The RF to RF gain is **+20 dB**, maximum. **Connectors are SMA female for the RF Out, RF In and RF In Monitor and BNC female for the external reference input and reference output.** Front panel LEDs provide indication of Remote Operation, DC Power, Mute, and PLL Alarm. Gain, band select, and internal/external/Auto reference selection are controlled by front panel switches or remote selection (Ethernet M&C or via the RS-232C/485 Monitor and Control connector) and are viewable on the LCD Display. In AUTO, the 10 MHz reference stays in external if the external level is in the +2 to +8 dBm range. **The 3116 is powered by a 100-240 ± 10% VAC power supply, and housed in a 1RU rack mount chassis, 1.75" H X 19.0" W X 19.0" deep.**

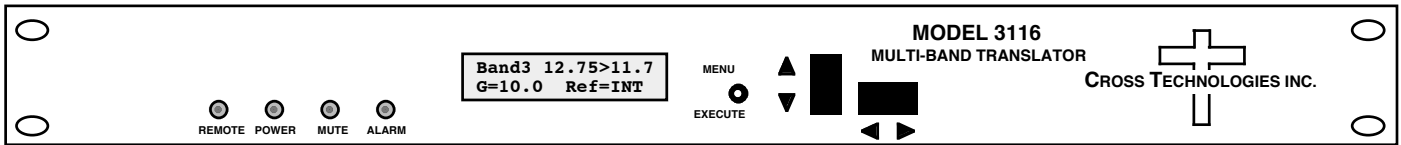

3116-T71-184 FRONT AND REAR PANELS

EQUIPMENT SPECIFICATIONS*

Input Characteristics

Impedance/Return Loss 50Ω/12 dB min, 14 dB typ.
 Frequency (GHz) SEE BAND CHART
 Noise Figure, Max. 20 dB at max. gain (G_{max})
 Input Level range -30 to -10 dBm
Non-damage input 0 dBm at max. gain

Output Characteristics

Impedance/Return Loss 50 Ω /10 dB min, 14 dB typ.
 Frequency (GHz) SEE BAND CHART
 Output Level Range -60 to 0 dBm
 Output 1 dB comp. **+8dBm min., at max gain**
Mute >60 dB from 0 dBm un-muted output (RF Mon. not muted)

Channel Characteristics

Gain at F_c +20 ±3 dB max., (+20 to -40 dB variable in 1±1 dB steps)
 Input to Output Isolation > 45 dB, min; (at max gain and 0 dBm out)
 Spurious, Inband > 40 dBC sig dep, <-50dBm sig indep; -10 dBm in, 0 dBm out
 Spurious, Out of band <-50 dBm, signal independent; f_c ± 2 GHz
Spurious, LO <25 dBm, measured at output, at max gain
 Intermod 2 Tone > 45 dBC (> 50 dBC typ.),
 for two carriers at 4 MHz spacing, each at -7 dBm out, G_{max}
 Frequency Response ±2 dB, over RF band; ± 0.5 dB, 40 MHz BW
 Frequency Sense Non-inverting

LO Characteristics

LO Frequency Band Specific
 Frequency Accuracy ± 0.05 ppm max over temp internal reference; ext. ref. input

Phase Noise @ F (Hz) >	100	1K	10K	100K	1M
Specification dBC/Hz	-65	-75	-80	-95	-110


10 MHz level In/Mon Input=+2 to +8 dBm in; Monitor Output = Input Level ± 1.0 dB, 50 ohms

Controls, Indicators

Gain, Band, 10M Freq. **Direct readout LCD; pushbutton switches** or via Ethernet M&C or Monitor and Control Connector.
 PLL Alarm Red LED, External contact closure
Remote, Power, Mute Yellow LED: Green LED: Yellow LED

Other

RF In, Out, Mon. Conn. **SMA (female), 50Ω**
 10 MHz connectors **BNC (female), 50 ohms; Works with 75Ω**
 Monitor/Control Conn. **RS232C/485, DB9, Female; Ethernet, RJ45, Female, w/Web Browser & SNMP User interfaces.**
 Size **1RU rack mount chassis, 1.75" H X 19.0" W X 19.0" deep**
 Power **100-240 ±10% VAC, 47-63 Hz, 25 watts max**

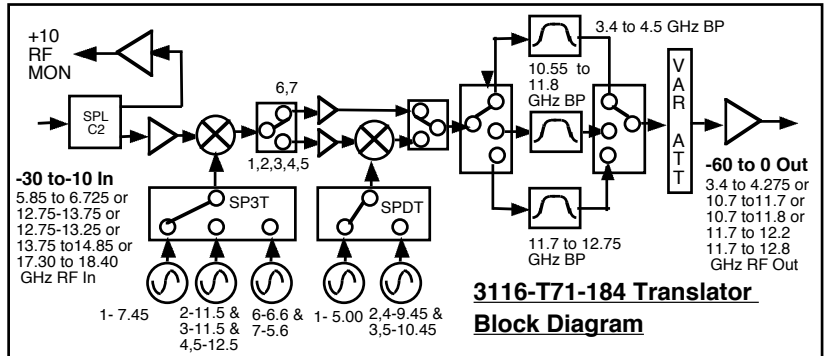

3116-T71-184 Translator Block Diagram

Band Chart - Frequencies, Translations

BAND NO.	IN RANGE (GHz)	OUT RANGE (GHz)	TRANSLATE (GHz)
1	5.85-6.725	3.4-4.275	2.45
2	12.75-13.75	10.7-11.7	2.05
3	12.75-13.25	11.7-12.2	1.05
4	13.75-14.85	10.7-11.8	3.05
5	13.75-14.85	11.7-12.8	2.05
6	17.3-18.4	10.7-11.8	6.6
7	17.3-18.4	11.7-12.8	5.6

* **+0 to +50 degrees C Operating; -30 to +60 degrees C Non-operating; 95% relative humidity, non-condensing;**
 Specifications subject to change without notice