

2116-6T4 Block Translator, 5.845 - 6.425 GHz to 3.62 - 4.20 GHz

The 2116-6T4 Block Translator converts 5.845 - 6.425 GHz to 3.62 - 4.20 GHz with a local oscillator at 2.225 GHz. Front panel LEDs provide indication of external 10 MHz (yellow), PLL alarm (red), and DC power (green). The gain is -30 dB to Output #1 and -50 to Output #2. Connectors are N-type female for RF and BNC female for the external reference input and reference output. A three-way switch controls which 10 MHz reference is being used. In the INT position, the internal reference is used, in the EXT position, the external reference is used, and in the AUTO position, the internal reference is used unless a +3 dBm ± 3 dB, 10MHz reference signal is connected to the external reference input. The 2116 is powered by a 100-240 ±10% VAC power supply, and housed in a 1 3/4" X 19" X 14" rack mount chassis.



Front Panel

EQUIPMENT SPECIFICATIONS*

Input Characteristics

Impedance/Return Loss 50Ω/15 dB
Frequency 5.845 to 6.425 GHz
Input Level range -10 to -30 dBm
Input 1 dB compression 0 dBm

Output Characteristics

Impedance/Return Loss 50Ω /15 dB
Frequency 3.62 to 4.20 GHz
Output Level Range (#1) -40 to -60 dBm
Output Level Range (#2) -60 to -80 dBm


Channel Characteristics

Gain -30 dB ±2 dB (Output #1); -50 dB ±2 dB (Output #2)
Input/Output Isolation 60 dB, min
Intermodulation <-50 dBC for two carriers each at -10 dBm
Frequency Response ±1.5 dB, over frequency band; ± 0.5 dB, 40 MHz BW
Frequency Sense Non-inverting

LO Characteristics

LO Frequency 2.225 GHz
Frequency Accuracy ± 0.01 ppm max over temp internal reference; ext. ref. input
10 MHz In/Out Level +3 dBm ± 3 dB

Phase Noise @ F (Hz) >	100	1K	10K	100K	1M
dBC/Hz	-70	-80	-90	-100	-110

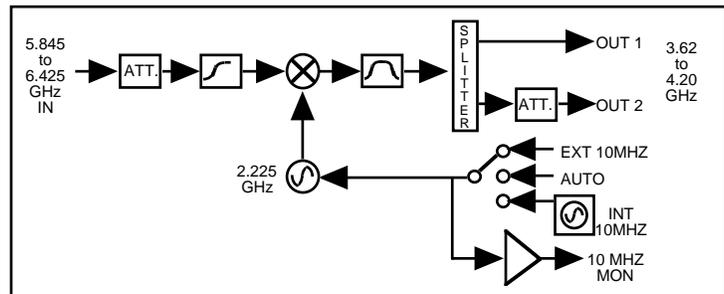

Block Diagram

Available Options

Connectors/Impedance
SS - 50Ω SMA (RF)

Controls, Indicators

Power Green LED
PLL Alarm Red LED, External contact closure
Ext 10 MHz Yellow LED, indicates external 10 MHz reference selected (rear panel DPDT switch)
10 MHz Reference 3-way Switch (selects INTERNAL, EXTERNAL, or AUTO mode)

Other

RF Connectors N-type (female)
10 MHz Connectors BNC (female), 50Ω/75Ω
Alarm Connector DB9 (female) - NO or NC contact closure on Alarm
Size 19 inch standard chassis 1.75" high X 14" deep
Power 100-240 ±10% VAC, 47 - 63 Hz, 45 watts max.

*10°C to 40°C; Specifications subject to change without notice