


2015-04-720 Upconverter, 720 MHz to 0.95 - 2.15 GHz

The 2015-04-720 L-band Upconverter converts 720 ± 36 MHz to 950 to 2150 MHz in 1 MHz steps (**125 kHz to 1 kHz step options available**). Synthesized local oscillators (LO) provide frequency selection. Push button switches select the RF frequency, gain, and other parameters. Front panel LEDs provide indication of DC power (green), PLL alarm (red), remote operation (yellow) and TX carrier MUTE (yellow). Variable attenuators for the IF input and output provide a gain range of -10 to +30 dB as adjusted by the front panel push-button switches. Remote operation allows selection of frequency and gain. Parameter selection and frequency and gain settings appear on the LCD display. Connectors are BNC female for IF and the optional external reference input and output, and Type F female for the RF output. SSPB **+24 or +48 VDC** and 10 MHz reference can be inserted on the RF line as added options. **The external 10 MHz option E** includes a 10 MHz output connector which contains either the internal or external 10 MHz reference signal. A high stability **option H** (± 0.01 ppm) is also available. The unit is powered by a $100\text{-}240 \pm 10\%$ VAC power supply, and housed in a $1\frac{3}{4}'' \times 19'' \times 16''$ rack mount chassis.

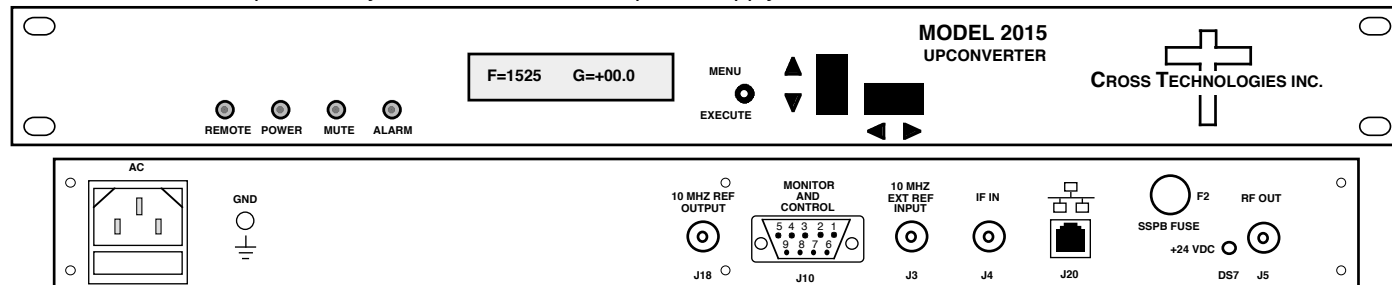

EQUIPMENT SPECIFICATIONS*

Input Characteristics (IF)

Impedance/Return Loss **50 Ω /18 dB**
 Frequency **720 $\pm$ 36 MHz**
 Input Level **-50 to -20 dBm**

Output Characteristics (RF)

Impedance/Return Loss **75 Ω /12 dB**
 Frequency **950 to 2150 MHz**
 Output level **0 to -20 dBm**
 Output 1 dB comp. **+5 dBm**

Channel Characteristics

Gain range (adjustable) **-10.0 to +30.0 dB**
 Frequency Response **± 1.5 dB, 950 - 2150 MHz; ± 0.5 dB, 72 MHz BW; ± 1.0 dB, 80 MHz BW**
 Spurious Response **< -50 dBC, in band**
 Group Delay, max **0.0035 ns/MHz² parabolic; 0.035 ns/MHz linear; 1 ns ripple**
 Frequency Sense **Non-inverting**

Synthesizer Characteristics

Frequency Accuracy **± 1.0 ppm max over temp (± 0.01 ppm, option H)**
 Frequency Step **1.0 MHz (**125 kHz to 1 kHz step options available**)**

Phase Noise @ F (Hz) >	10	100	1K	10K	100K	1M
dBc/Hz	-55	-70	-70	-80	-90	-110

10 MHz Level (In or Out) **3 dBm, ± 3 dB, 75 ohms (option E)**

Controls, Indicators


Freq/Gain Selection **direct readout LCD; manual or remote selection**
 Pwr; Alarm; Rem; Mute **Green LED; Red LED; Yellow LED; Yellow LED**
 Remote **RS232C, 9600 baud (**RS485, Ethernet Optional**)**

Other

RF, IF Connectors **75 Ω BNC (female), 50 Ω BNC (female)**
 10 MHz Connectors **BNC (female), 75 Ω , works with 50 or 75 ohms (option E)**
 Alarm/Remote Connector **DB9 (female) - NO or NC contact closure on Alarm**
 Size **19 inch, 1RU standard chassis 1.75" H X 16.0" D**
 Power **100-240 $\pm 10\%$ VAC, 47-63 Hz, 25 W max.**

*10°C to 40°C; Specifications subject to change without notice.

2015-04-720 Front and Rear Panels

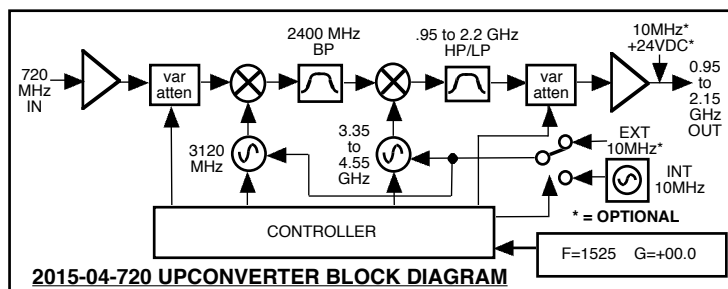

Available Options

E - External 10 MHz ref in & out; RF Ins.
 H - High Stability (± 0.01 ppm) Internal Ref
 V - SSPB Voltage, +24VDC, 2.5 amps
V48 - SSPB Voltage, +48VDC, 1.25 A
V41 - SSPB Voltage, +48VDC, 2.10 A
 X or X1- 125 kHz or 100 kHz step size
X1002 - 1 kHz step, includes option H
 Z - Attenuator 0.1 dB steps, Upconverter
Comm. Interface/Standard RS232
 Q - RS485 Remote Interface
 W8 - Ethernet; w/Web Browser (WB)
 W18 - Ethernet; w/WB & SNMP
 W28 - Ethernet; w/TCP/IP, Telnet
Connectors/Impedance
 B - 75 Ω BNC (RF), 75 Ω BNC (IF)
 C - 50 Ω BNC (RF), 75 Ω BNC (IF)
 D - 50 Ω BNC (RF), 50 Ω BNC (IF)
 N - 50 Ω N-type (RF), 75 Ω BNC (IF)
 M - 50 Ω N-type (RF), 50 Ω BNC (IF)
Contact Cross for other options