




DATA SHEET

11/07/2006

2116-107 Block Downconverter, 10.7 - 11.7 GHz to 0.95 - 1.95 GHz

The 2116-107 Downconverter converts 10.7 - 11.7 GHz to 0.95 - 1.95 GHz with a local oscillator at 9.75 GHz. Front panel LEDs provide indication of DC Power, External 10 MHz, and PLL Alarm. The gain is +35 dB. Connectors are SMA female for the RF and BNC female for the L-Band and external reference input and reference output. A three-way switch controls which 10 MHz reference is being used. In the INT position, the internal reference is used, in the EXT position, the external reference is used, and in the AUTO position, the internal reference is used unless a +3 dBm $\pm$ 3 dB, 10MHz reference signal is connected to the external reference input. The 2116 is powered by a 90-260 VAC power supply, and mounted in a 1 3/4" X 19" X 14" rack mount chassis.

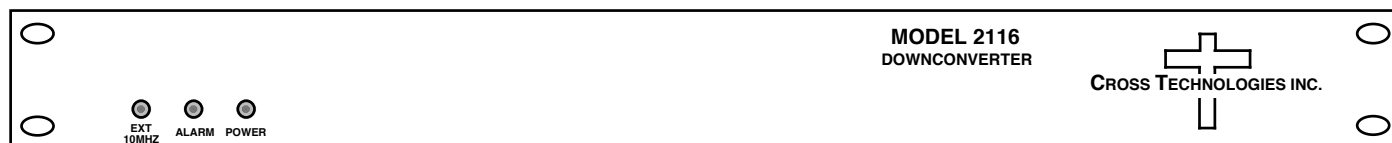

Front Panel

EQUIPMENT SPECIFICATIONS*

Input Characteristics (RF)

Impedance/Return Loss	50 Ω /14 dB
Frequency	10.7 to 11.7 GHz
Noise Figure, Max.	20 dB max gain
Level	-55 to -35 dBm
1dB Compression	-25 dBm

Output Characteristics (IF/L-Band)

Impedance/Return Loss	50 Ω /14 dB
Frequency	0.95 to 1.95 GHz
Level	-20 to 0 dBm
1dB Compression	+10 dBm

Channel Characteristics

Gain	+35 dB $\pm$ 2 dB
Image Rejection	> 60 dB, min
Spurious, In Band	SIGNAL RELATED<-60 dBC in band, 0 dBm out; SIGNAL INDEPENDENT,<-60 dBm
Spurious, Out of Band	<-50 dBm
Intermodulation	<-55 dBC for two carriers each at -10 dBm out
Frequency Response	$\pm$ 1.5 dB, 950 - 1950 MHz out; $\pm$ 0.5 dB, 40 MHz BW
Frequency Sense	Non-inverting

LO Characteristics

LO Frequency	9.75 GHz
Frequency Accuracy	$\pm$ 0.01 ppm max over temp internal reference; ext. ref. input
10 MHz level In/Out	+3 dBm $\pm$ 3 dB
Phase Noise	@ Freq 100Hz 1kHz 10kHz 100kHz 1MHz
	dBc/Hz < -70 < -80 < -85 < -100 < -110

Controls, Indicators


Ext 10 MHz	Yellow LED, indicates external 10 MHz reference selected (rear panel DPDT switch)
PLL Alarm	Red LED, External contact closure
Power	Green LED

Other

RF Connector	SMA (female)
IF Connector	BNC (female)
10 MHz connectors	BNC (female), 50 Ω /75 Ω
Alarm Connector	DB9 - NO or NC contact closure on Alarm
Size	19 inch standard chassis 1.75" high X 14.0" deep
Power	90 - 260 VAC, 47 - 63 Hz, 45 watts max.

Available Options

Connectors/Impedance
FN - 50 Ω N-type (RF), 75 Ω F-type (IF)
M - 50 Ω N-type (RF), 50 Ω BNC (IF)
N - 50 Ω N-type (RF), 75 Ω BNC (IF)
NN - 50 Ω N-type (RF), 50 Ω N-type (IF)
NS - 50 Ω SMA (RF), 50 Ω N-type (IF)

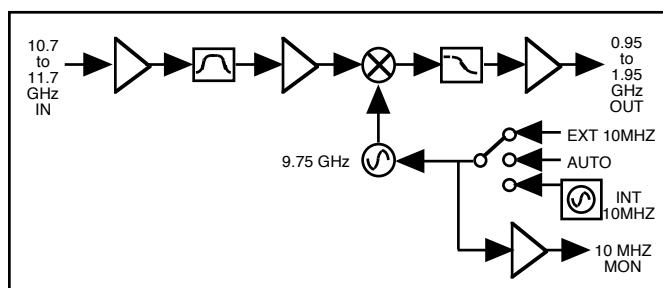

Block Diagram

*+10 to +40 degrees C; Specifications subject to change without notice